

RD300



FLO2R-S

MOF

MOSE

MLBT

TS

The kit contains:

RD300 1 irreversible electromechanical gear motor, 24 Vdc, with incorporated control unit and receiver.
FLO2R-S 1 transmitter 433.92 MHz, 2 channels. **MOF** 1 pair of photocells for outdoor installation.
MOSE 1 key selector switch for outdoor installation. **MLBT** 1 flashing light with integrated aerial. **TS** 1 signboard.


For sliding gates weighing up to 300 kg and up to 6 m lenght.

- Practical:** built-in control unit, can be connected by means of a simple connector and can be housed directly inside the motor; incorporated radio card, compatible with the Nice Flo and Smilo systems: 150 transmitters can be entered!
- Advanced:** the speed, strength and pause can all be adjusted.
- Intelligent:** thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light.
- Safe:** acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.

Technical specifications

Code	RD300
Electrical data	
Power supply (Vac 50 Hz)	230
Absorption (A)	1.1
Power (W)	210
Built-in capacitor (µF)	-
Performance data	
Speed (m/s)	0.25
Force (N)	300
Work cycle (cycles/hour)	20
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	330x195x277 h
Weight (kg)	8

Installation diagram

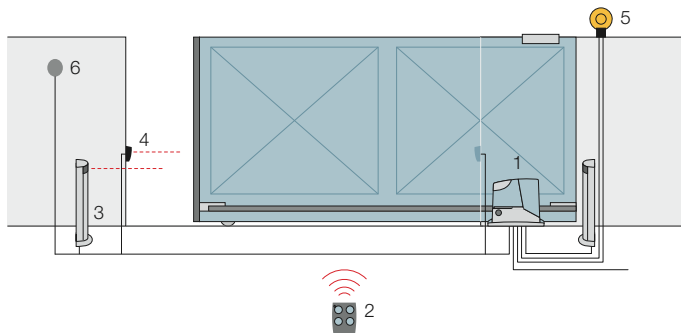

1. Road 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Digital or key switches.