


WG5000

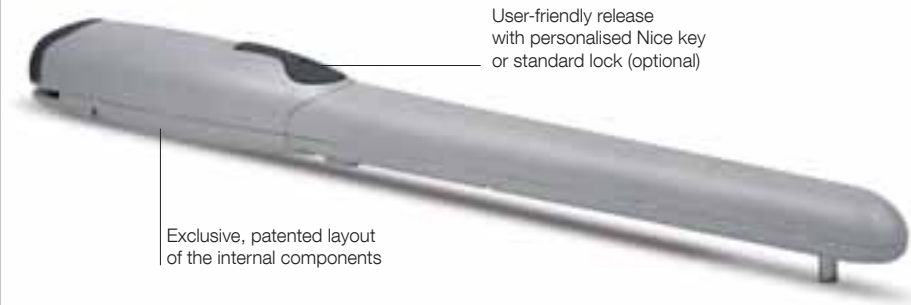

For swing gates with leaves up to 3.5 m, surface mounted.

- Reliable and silent:** patented layout of internal parts, fewer moving parts.
- Easy to install:** after the gear motor has been assembled, all electrical connections are made from above.
- Built-in capacitor.**
- User-friendly release** with personalised Nice key or standard lock (optional).
- Pre-assembled,** travel stops PLA13 on opening.
- A60 control unit** for two 230 Vac motors with electronic clutch and slowdown, IP55 casing.

FLO2R-S 	A60 	MOF
MOSE 	MLT 	PLA13 TS

The kit contains:

WG5000 2 surface-mounted electromechanical gear motors, with Nice key release.
FLO2R-S 1 transmitter 433.92 MHz, 2 channels. **A60** 1 control unit A60 with SMXI plug-in receiver.
MOF 1 pair of photocells for outdoor installation. **MOSE** 1 key selector switch for outdoor installation.
MLT 1 flashing light with integrated aerial. **PLA13** 2 travel stops for opening manoeuvres. **TS** 1 signboard.

Code	Description	Pack/pallet
WINGO5KCE	Kit for swing gates with leaves up to 3.5 m, surface mounted	12


N.B. The content of the package may vary: consult the retailer.


Technical specifications

Code	WG5000
Electrical data	
Power supply (Vac 50 Hz)*	230
Absorption (A)	1.5
Power (W)	200
Performance data	
Speed (m/s)	0.013
Force (N)	1700
Work cycle (cycles/hour)	30
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	920x98x95 h
Weight (kg)	6



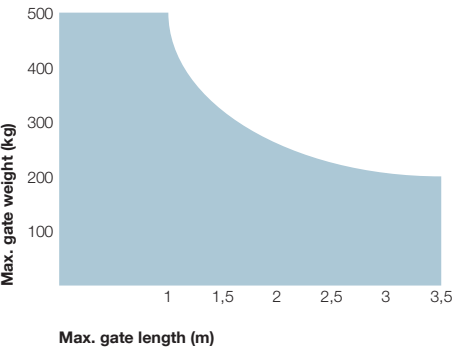


*60 Hz version available on request.

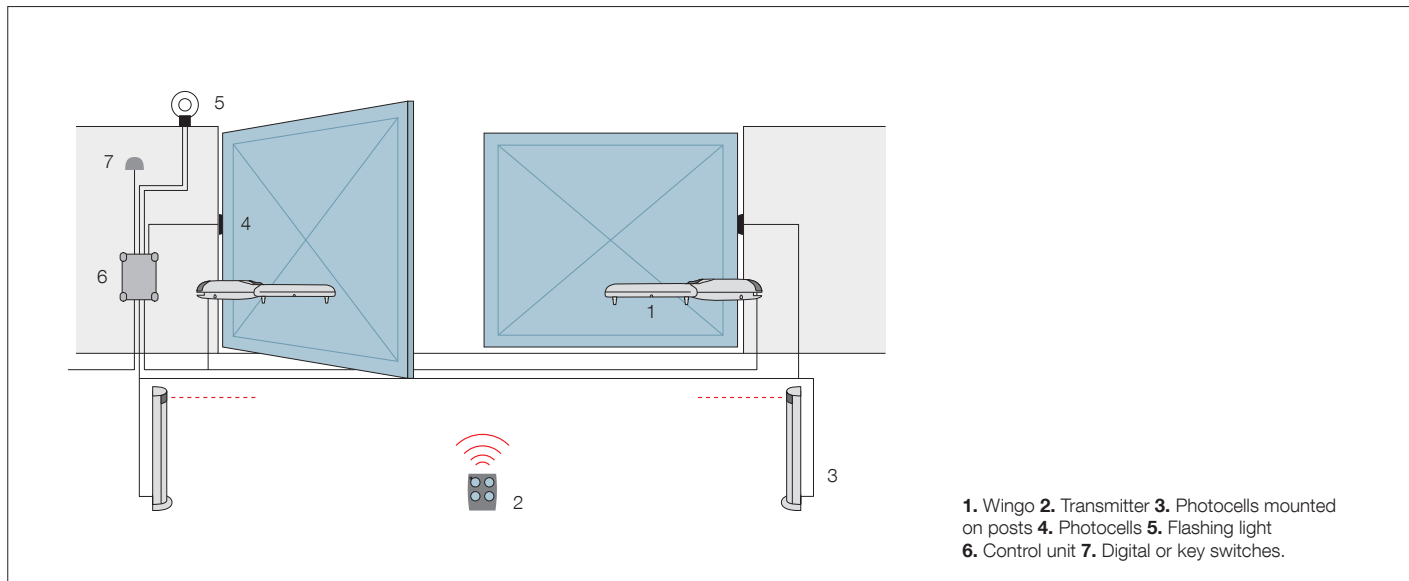Utilisation limits





Accessories

					
PLA6 Rear bracket 250 mm long. Pc/pack 1	PLA8 Screw-adjustable front bracket. Pc/pack 1	CM-B Pawl with two metal release keys.	PLA10 Vertical 12 V electric lock (required for gates longer than 3 m). Pc/pack 1	PLA11 Horizontal 12 V electric lock (required for gates longer than 3 m). Pc/pack 1	PLA13 Mechanical travel stops for closing and opening manoeuvres. Pc/pack 4

