




	220/PL 600A	275/PL 600A	355/PL 600A
MOVING CYLINDER	FE 370 STEEL (IRON) AISI 304 STAINLESS STEEL	FE 370 STEEL (IRON)	
MOVING CYLINDER NOMINAL DIAMETER	220 mm	275 mm	355 mm
MOVING CYLINDER HEIGHT	600 mm		
MOVING CYLINDER FE 370 STEEL THICKNESS	4 mm	5 mm	
MOVING CYLINDER STAINLESS STEEL THICKNESS	AISI 304 :4 mm	-	-
MOVING CYLINDER FE 370 STEEL FINISH	POLYESTER POWDER PAINT – STANDARD GREY ANTHRACITE		
MOVING CYLINDER STAINLESS STEEL FINISH	AS ABOVE, OR BRUSHED	-	-
REFLECTING ADHESIVE STRIP	YES - HEIGHT 55 mm		
RISING SPEED	15 cm/sec		
LOWERING SPEED	30 cm/sec		
MANUAL EMERGENCY LOWERING	YES (VERSION WITH RELEASE NO 220 = AUTOMATIC LOWERING)		
SAFETY REVERSAL PRESSURE SWITCH	YES		
CONNECTION LINE TO CONTROL UNIT	STANDARD 10 mt (MAXIMUM LENGTH: 20 mt)		
HYDRAULIC PUMP	IN THE CONTROL UNIT		
GRADE OF PROTECTION	IP 67		
TYPE OF USE	INTENSIVE - LIFE AVERAGE 2.000.000 MOVEMENTS - 2.000 MOVEMENTS/DAY		
IMPACT RESISTANCE (WITHOUT DEFORMATION) 	30.000 J	40.000 J	
BREAKOUT RESISTANCE 	150.000 J	200.000 J	
OPERATING TEMPERATURE	– 40°C + 60°C (FOR LOW TEMPERATURES SEE HEATING RESISTANCE)		
NOMINAL PILOMAT WEIGHT (WITHOUT PIT)	65 kg	80 kg	110 kg
NOMINAL WEIGHT OF STANDARD PIT, WITH COUNTER-FRAME AND BRACKETS	34 kg	40 kg	60 kg

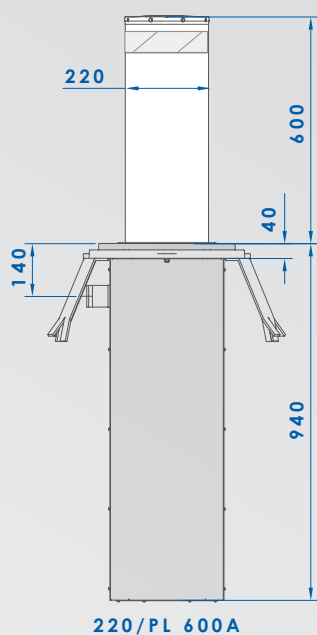

220/PL 600A

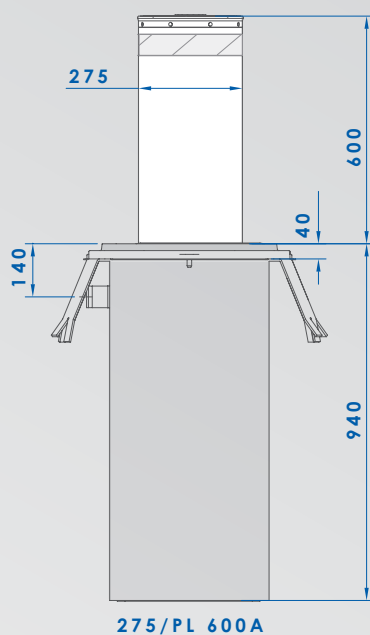

275/PL 600A

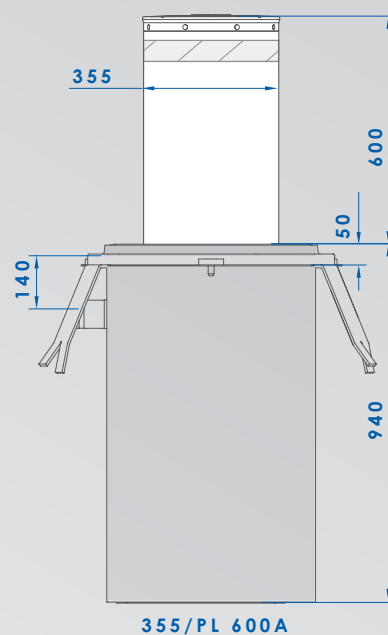

355/PL 600A